


BNC/Female to BNC/Female Adaptor 4 GHZ

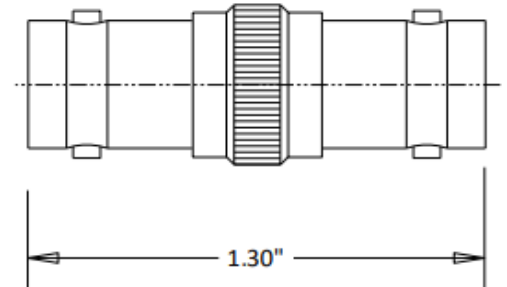

Dimensional Tolerances

.X	±.030
.XX	±.010
.XXX	±.005

TECHNICAL SPECIFICATIONS	
Frequency	DC-4GHz
VSWR	≤1.15 @DC-3GHz
Impedence	75 Ohms
ELECTRICAL&MECHANICAL SPECIFICATIONS	
BNC Interface Per	MIL-STD-348B
Dielectric Withstanding Voltage	≥2500V RMS,50 Hz, at sea level
Working Voltage	1000Vrms,50 Hz at sea level
Contact Resistance	Center Contact ≤ 1.0 mΩ Outer Contact ≤ 0.25 mΩ
Dielectric Resistance	≥5000MΩ
Durability	Mating cycles ≥500
Operating Temperature	-40°C~+100°C
Waterproof Rate	IP 68
RoHS Compliant	Yes
MATERIALS	
Body	Nickel Plated Brass
Insulator	PTFE
Center conductor	Phosphor bronze (Au)