


N Female to N Female Connector Adaptor

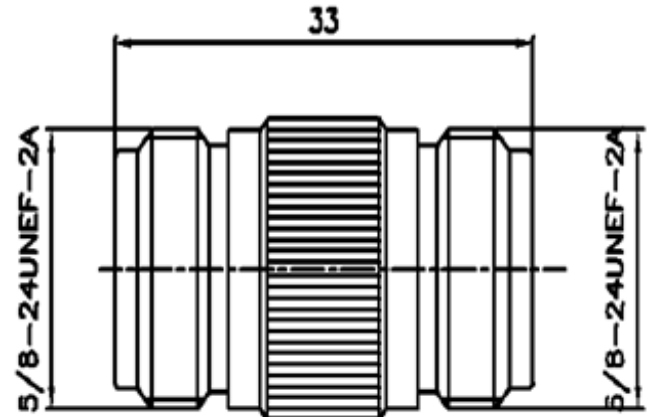

Electrical & Mechanical Specifications		
Characteristics Impedance	50 ohm	
Frequency Range	DC-11GHz	
VSWR	≤ 1.10 @DC-3000MHz	
Dielectric Withstanding Voltage	2500V RMS,50Hz at sea level	
Working Voltage	1000V RMS,50Hz,at sea level	
Contact Resistance	Center Contact $\leq 1.0 \text{ m}\Omega$ Outer Contact $\leq 0.25 \text{ m}\Omega$	
Dielectric Resistance	$\geq 5000 \text{ M}\Omega$	
Durability	Mating cycles ≥ 500	
Material & Plating		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center conductor	Phosphor bronze	Au
Press ring	Brass	Ni
Mechanical Specification		
Temperature Range	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$	
Waterproof Rate	IP 68	
RoHS Compliant	Yes	