


N Male to N Male Adaptor

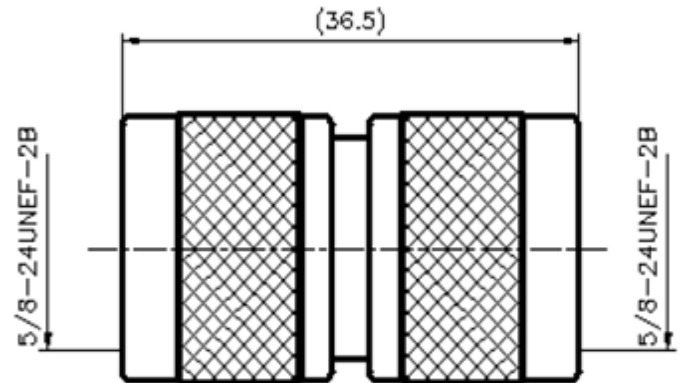

Electrical & Mechanical Specifications		
Characteristics Impedance	50 ohm	
Frequency Range	DC-11GHz	
VSWR	≤1.15@DC-6000MHz	
Dielectric Withstanding Voltage	2500V RMS,50Hz at sea level	
Working Voltage	1000Vrms,50 Hz at sea level	
Contact Resistance	Center Contact ≤ 1.0 mΩ Outer Contact ≤ 0.25 mΩ	
Dielectric Resistance	≥5000MΩ	
Durability	Mating cycles ≥500	
Material & Plating		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center conductor	Phosphor bronze	Au
Coupling nut	Brass	Ni
Retaining ring	Brass	-
Gasket	Silicone rubber	-
Mechanical Specification		
Temperature Range	-40°C~+85°C	
Waterproof Rate	IP 68	
RoHS Compliant	Yes	