

# SRFS TELEINFRA

SRFS-3070-OMN Series 4/ 5/ 6/ 8 Band, Outdoor

Drone UAV Jammer 4/ 5/ 6/ 8 Bands, Omni Antennas Waterproof for Outdoor



| SRFS-3074-OMN(4 bands)     | SRFS-3075-OMN(5 bands)            | SRFS-3076-OMN(6 bands)            | SRFS-3078-OMN(8 bands)            |
|----------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| 433MHz: 50W                | 433MHz: 50W                       | 433MHz: 50W                       | 433MHz: 50W                       |
| Remote Control             | Remote Control                    | Remote Control                    | Remote Control                    |
| 5.8GHz: 10W                | 5.8GHz: 10W                       | 5.8GHz: 10W                       | 5.8GHz: 10W                       |
| WiFi 11.a                  | WiFi 11.a                         | WiFi 11.a                         | WiFi 11.a                         |
| 2.4-2.5GHz:20W             | 2.4-2.5GHz:20W                    | 2.4-2.5GHz:20W                    | 2.4-2.5GHz:20W                    |
| WiFi 11.g, b, Bluetooth    | WiFi 11.g, b, Bluetooth           | WiFi 11.g, b, Bluetooth           | WiFi 11.g, b, Bluetooth           |
| GPS L1 + GLONASS L1 Hz:40W | GPS L1 + GLONASS L1 Hz:40W        | GPS L1 + GLONASS L1 Hz:40W        | GPS L1 + GLONASS L1 Hz:40W        |
| N/A                        | 868-915MHz:25 W<br>Remote Control | 868-915MHz:25 W<br>Remote Control | 868-915MHz:25 W<br>Remote Control |
| N/A                        | N/A                               | GPS L2 + GLONASS L2:15W           | GPS L2 + GLONASS L2 :15W          |
| N/A                        | N/A                               | N/A                               | GPS L5 1176MHz :15W               |
| N/A                        | N/A                               | N/A                               | GPS L3 + L4:15W                   |
|                            |                                   |                                   | 1370-1385MHz                      |
| <b>Total : 120W</b>        | <b>Total : 145 W</b>              | <b>Total : 160 W</b>              | <b>Total : 190 W</b>              |

Option: GPS L2 L3 L4 L5: 15W, VHF 130-180MHz: 20W, 300-400MHz: 20W, UHF 420-480MHz: 20W,

LoJack 173MHz: 30W, 5.8GHz 15.0W or 25.0W

## Cover Most Commercial Used Drones / UAVs

Most professional Drones/UAVs (Distance 3-5Km) use 2.4GHz for Remote Control System Like **Dji Phantom 4, Phantom 3 Professional, Advanced Series, Inspire Series..**

Adjustable Output Power each Band/Channel, Max Output Power to 0 (OFF)

100% Safe VSWR over protection (Isolator) for each modular

Ethernet interface for control of Jammers ON/OFF (Wireless Option, too)

|                      |  |
|----------------------|--|
| <b>Power supply:</b> | AC110 or 220-240V /DC 27V                            |
| <b>Jamming Range</b> | Radius 300-800+ meters                               |
| <b>Weight</b>        | 25Kg   |
| <b>Dimension:</b>    | 520 x 340 x 200mm                                    |
| <b>Working time:</b> | Without the time limit, May continue to work,        |
| <b>Antenna</b>       | External Omni 500mm long Antennas with Magnetic Base |
| <b>Warranty:</b>     | 1 year   |

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)



# SRFS TELEINFRA

SRFS-3070-OMN Series 4/ 5/ 6/ 8 Band, Outdoor



## Omni Antenna Magnetic Base

### SRFS-3074-OMN 4 Bands



### SRFS-3075-OMN 5 Bands



### SRFS-3076-OMN 6 Bands



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)

# SRFS TELEINFRA




SRFS-3070-OMN Series 4/ 5/ 6/ 8 Band, Outdoor

SRFS-3078-OMN 8 Bands



- ◆ The input power applied from 110V or 220V AC.

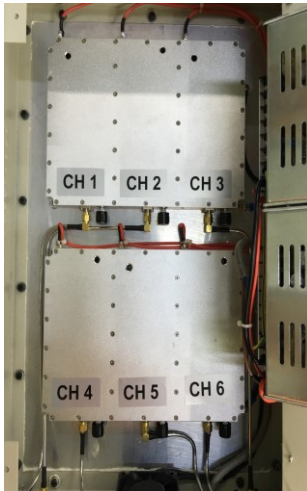


**\*\*\*NOTE\*\*\*:**

**Before you turn on the jammer,  
please.....**

**Make sure connect all Antennas  
to the jammer**

Step 1: Open the case

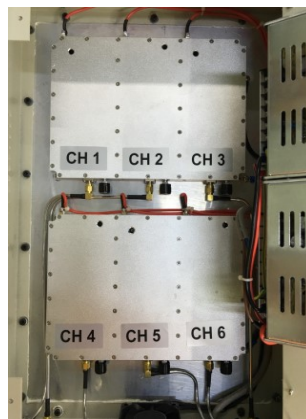

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)




# SRFS TELEINFRA




SRFS-3070-OMN Series 4/ 5/ 6/ 8 Band,

**Step 2: Connect all Antennas: CH1 to Antenna CH1, CH2 to CH2....**

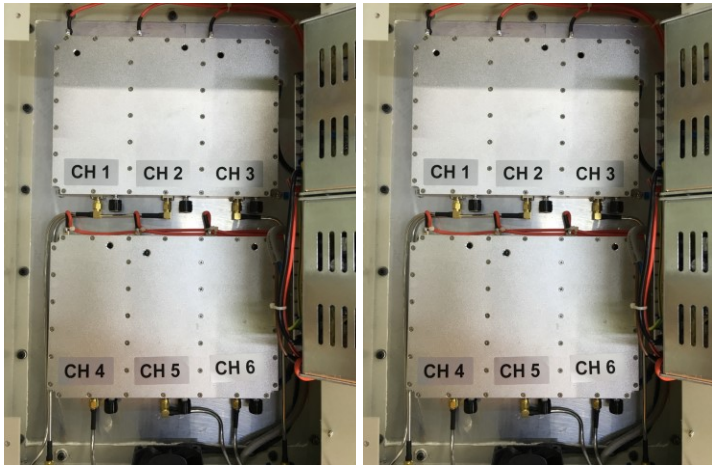

**Step 3: Connect AC Power Cord.. and Switch each band output power to Max...**

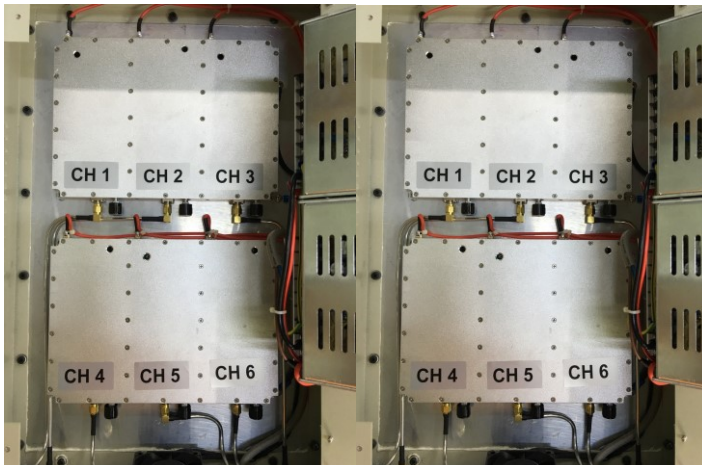

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)

