
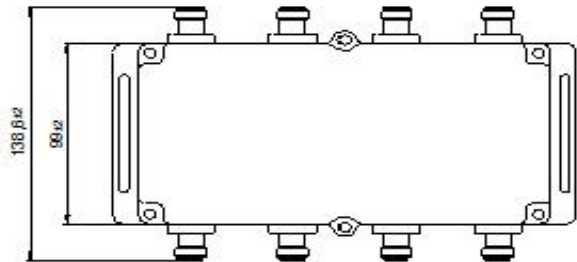


Hybrid Combiner 4*4 (698-4000MHz, 300W, N-F, IP65, -155dBc)

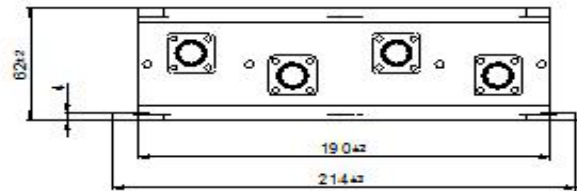

Product Features:

- Wide Frequency Band 698-3800MHz
- 2G/3G/4G/LTE/5G Coverage
- Low Passive Inter-modulation
- Low VSWR & Insertion Loss
- High Isolation, Indoor & Outdoor, IP65
- Widely used for In-building Solutions

Electrical & Mechanical Specifications

Model No.	SRFS-738-44-NF-155
Freq(MHz)	698-4000
Coupling(dB)	6.1
Insertion Loss(dB)	≤1.5
Port Isolation(dB)	≥23
VSWR	≤1.25 (698-2700MHz); ≤1.3 (2700-4000MHz)
3rd PIM(dBc)	≤-155dBc@2*43dBm
Average Power(W)	300
Impedance	50 ohm
Connector	N-Female
Color	Black or Light-Gray
Temp(deg)	-35~+65
Application	Indoor & Outdoor, IP65
Relative Humidity	5%-95%
Dimensions(mm)	214*138.8*82 (Connectors Included)