


SRFS TELEINFRA



Quad-band Combiner (Single Unit)SRFS-327-DF-160

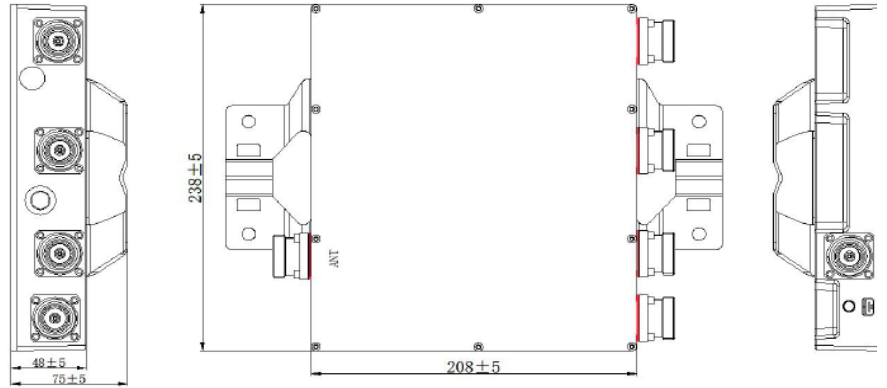

Product Description:

- Compact, Low Weight
- Contain GSM900/DCS1800/UMTS2100/LTE2600 bands
- Low Passive Inter-modulation
- High Reliability
- Simple installation

Electrical & Mechanical Specifications

Frequency	CH1: 380 to 960MHz CH2: 1710 to 1880MHz CH3: 1920 to 2200MHz CH4: 2300 to 2690MHz
VSWR	≤1.3
Insertion loss	≤0.5dB
Isolation	50dB minimum
Power handling	200W Average (Per Port) 1000W Peak
Inter-modulation (3rd order)	≤-160dBc@2*43dBm
Impedance	Impedance 50 Ohm
Connectors type	7/16 DIN-Female
Net Weight	TBA
Outer Dimension(mm) Excluded)	238*208*48 (Connector & Mounting Bracket
Packing	1Pce in box
Mounting Pole	Wall Mount with bracket

Environmental Specifications

Operating temperature range	-10°C to +50°C
Storage temperature range	-40°C to +85°C
Relative humidity	5% - 95%
Applications	IP65 (Indoor & Outdoor)
Color	Light Grey

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

 www.srfsteleinfra.in

SRFS TELEINFRA




Quad-band Combiner (Single Unit)SRFS-327-DF-160

Product Image



Installation Instructions

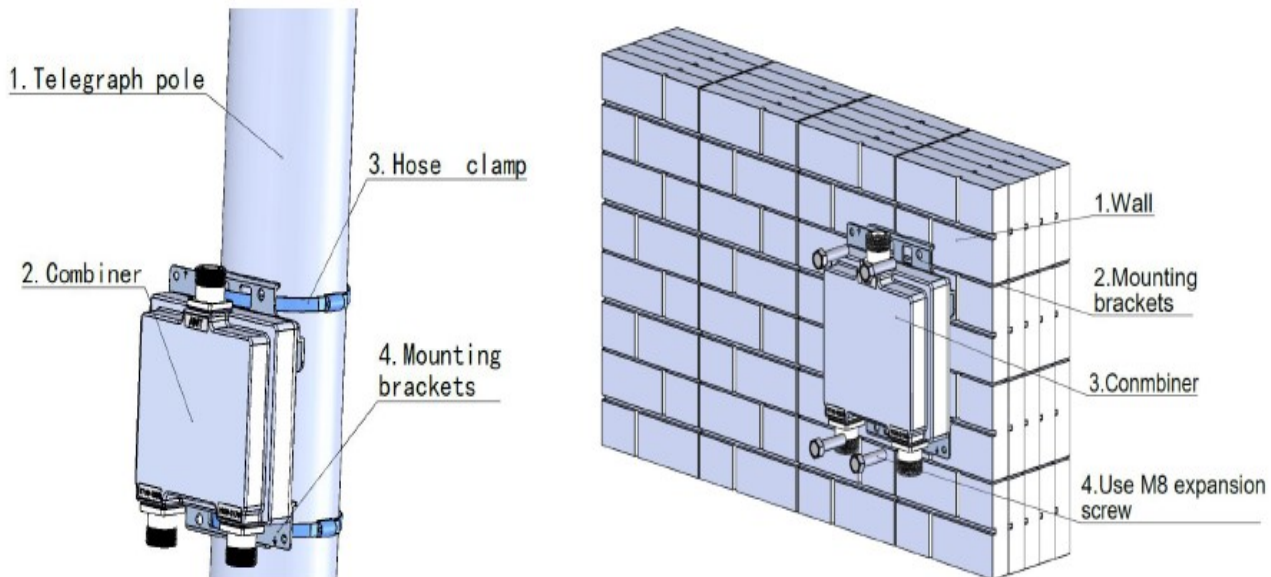

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in