


5800-6200 MHz Band Pass Filter SRFS-BPF-6000MS1

Specifications

1	Center Frequency (F0)	6000MHz	
2	Pass Band Frequency	5800 ~ 6200 MHz	
3	Pass Band Insertion Loss	≤1.4dB	
4	Pass Band Ripple	≤0.8dB	
5	Pass Band Return Loss	≥23dB	
6	Stop Band Rejection	≥80dB @ DC ~ 5550MHz ≥60dB @ 5550 ~ 5600MHz	≥60dB @ 6400 ~ 6450MHz ≥80dB @ 6450 ~ 17000MHz
7	Impedance	50 Ohms	
8	Power Handling	10W max	
9	Connectors	SMA-Female	
10	Surface Finish	Black Painted	
11	Temperature Range	-30℃ ~ +70℃	
12	Net Weight	140g	

Dimensions(mm)

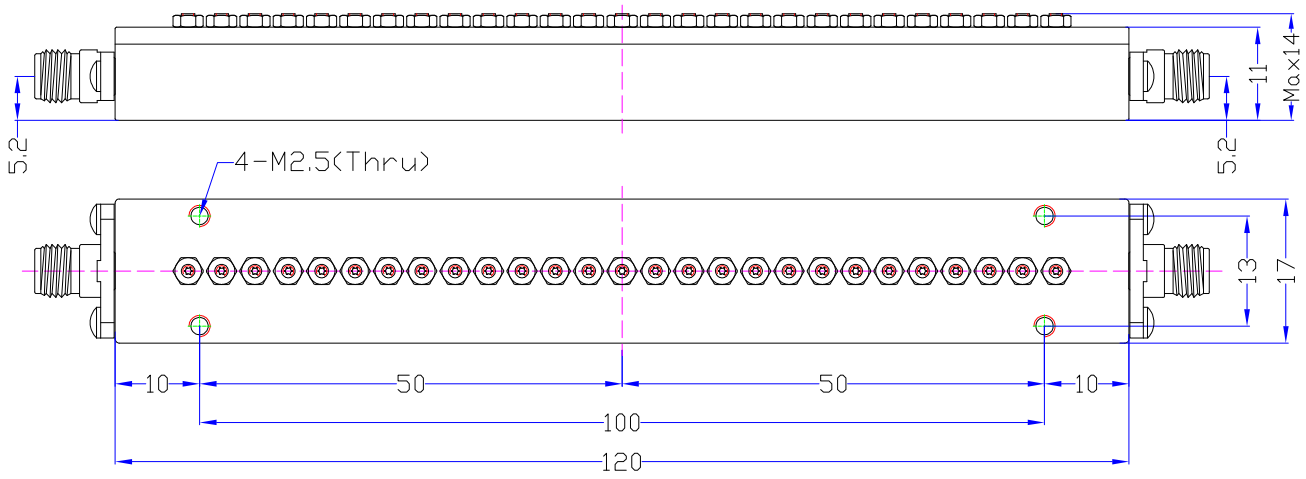



5800-6200 MHz Band Pass Filter SRFS-BPF-6000MS1

Typical Test Data

