


2 Way Reactive Power Splitter Divider

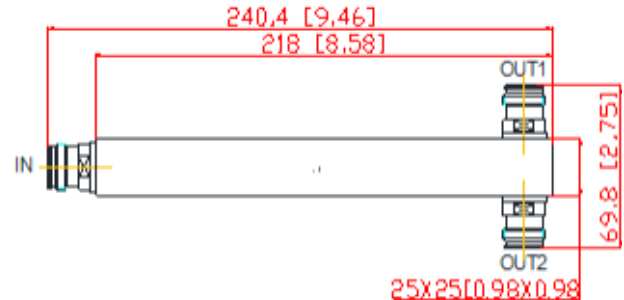

Product Description:

550-6000MHz Reactive Power Divider

550 / 600-6000MHz 4.3-10 Female Mini Din Low PIM -165dbc 2 Way Reactive Power Splitter Divider For DAS IBS

Mechanical & Electrical Specifications	
Part Number	SRFS-PS-05560-OP2
Operating Frequency (MHz)	550-6000
Impedence (Ohm)	50
VSWR	≤1.3
Split Loss (dB)	≤3.5(smooth on test)
IM3 (dBc @ 2×43dBm)	-155/ -163
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	4.3-10 Female
Handling Power (Watt, max)	500
Peak Power (Watt, max)	1500
Dimension (mm)(L×W×H, excl connector)	218 × 25 × 25
Net Weight (g)	405 ± 20
Packing Dimensions (mm, L×W×H)	260 × 80 × 40
Packing Carton Size (mm,L×W×H)	540 × 420 × 140
ROHS Compliance	Yes
Color	Customized
Connector	4.3-10 Female
Design	Wide Band

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



2 Way Reactive Power Splitter Divider



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in