


3 Way Reactive Round Power Splitter

Product Description:

N Female DAS IBS 698 To 6000MHz Three Way Splitter 698-6000MHz N Female Mini Design Low PIM -165dbc

3 Way Reactive Round Power Splitter For DAS IBS Reactive power splitters have been used to be signal divider- component for antenna distribution system (DAS) and signal cable systems for in-building /out building signal coverage because of their low loss and rugged nature., reactive splitters are quarter wave length lines matched to split signals evenly to the output paths. This characteristic allows for efficient, high power, broadband operation with minimal solder joints and better 3rd PIM.

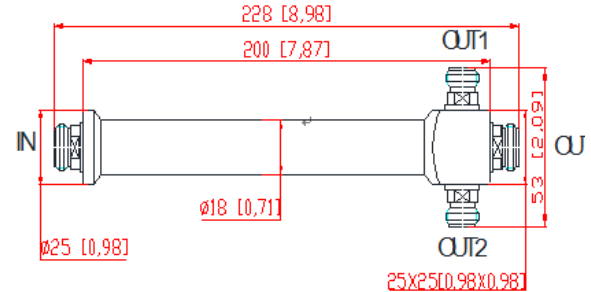

Mechanical & Electrical Specifications

| | |
|---------------------------------------|--------------------|
| Part Number | SRFS-PS-0760-ON3-R |
| Operating Frequency (MHz) | 698-6000 |
| Impedance (Ohm) | 50 |
| VSWR | ≤1.25 |
| Split Loss (dB) | ≤5.6 |
| IM3 (dBc @ 2×43dBm) | -155 / -163 |
| Application | Indoor & Outdoor |
| Degree of Protection | IP65 |
| Operating Temperature (°C) | -40 ~ + 80 |
| Interface | N Female |
| Handling Power (Watt, max) | 300 |
| Peak Power (Watt, max) | 1200 |
| Dimension (mm)(L×W×H, excl connector) | 200 × 25 × 25 |
| Net Weight (g) | |
| Packing Dimensions (mm,L×W×H) | 240 × 80 × 35 |
| Packing Carton Size (mm,L×W×H) | 500 × 420 × 160 |
| ROHS Compliance | Yes |
| Color | Customized |
| Connector | N Female |

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

3 Way Reactive Round Power Splitter

