


380-3800MHz Easy Mounting 300W 2 Way Rf Power Splitter

Product Description:

380-3800MHz Easy Mounting 300W 2 Way Rf Power Splitter

350-3800MHz 380-3800MHz N Female IP65 Low Pim -163dBc Reactive Power Splitter For DAS IBS

Reactive power splitters have been used to be signal divider-component for antenna distribution system (DAS) and signal cable systems for in-building /out building signal coverage because of their low loss and rugged nature., reactive splitters are quarter wave length lines matched to split signals evenly to the output paths. This characteristic allows for efficient, high power, broadband operation with minimal solder joints and better 3rd PIM

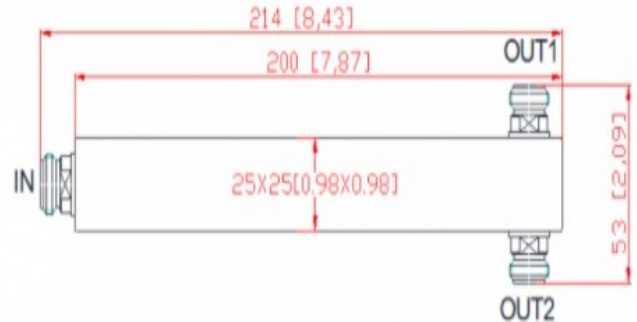

Mechanical & Electrical Specifications

Part Number	SRFS-PS-03538-ON2
Operating Frequency (MHz)	350/380-3800
Impedance (Ohm)	50
VSWR	≤1.25
Split Loss (dB)	≤3.7
IM3 (dBc @ 2×43dBm)	-155/ -160
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	N Female
Handling Power (Watt, max)	300
Peak Power (Watt, max)	1200
Dimension (mm)(L×W×H, excl connector)	200 × 25 × 25
Net Weight (g)	320 ± 20
Packing Dimensions (mm,L×W×H)	240 × 80 × 35
Packing Carton Size (mm,L×W×H)	500 × 420 × 160
ROHS Compliance	Yes
Color	Customized
Connector	N Female

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



380-3800MHz Easy Mounting 300W 2 Way Rf Power Splitter



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in