

550-2700MHZ 500w 2 In 2 Out 4.3-10 Female Stripline Directional Coupler

Product Description:


550-2700MHZ 500w 2 In 2 Out 4.3-10 Female Stripline Directional Coupler

550-2700MHZ 4.3-10 Female Low PIM 3dB Hybrid Coupler Combiner DAS

Hybrid couplers are the special case of a four-port directional coupler that is designed for a 3-dB (equal) power split. Hybrids come in two types, 90 degree or quadrature hybrids, and 180 degree hybrids.

Hybrid couplers are widely used as a directional 3db coupler with one termination port , also can be used as a combiner of 2 in 2 out and 2 in 1 out .

For some usage ,hybrid couplers can be combined as matrix, for example 4in 4out ,3in 3out etc.

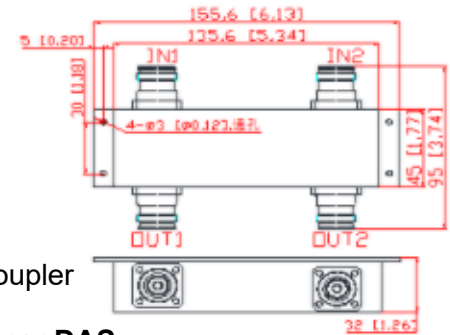

Mechanical & Electrical Specifications	
Part Number	SRFS-HC2x2-05527-OP
Operating Frequency (MHz)	550-2700
Impedance (Ohm)	50
VSWR	1.25
Coupling (dB)	3
Insertion Loss (dB)	±0.7
Isolation (dB)	25
IM3 (dBc @ 2x43dBm)	-153/-163
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	4.3-10 Female
Handling Power (Watt, max)	500
Peak Power (Watt, max)	1500
Dimension (mm)(L×W×H, excl connector)	135.6X45X32
Net Weight (g)	670
Packing Weight (kg/pcs)	14.5/20
Packing Dimensions (mm,L×W×H)	170X100X40
Packing Carton Size (mm,L×W×H)	520X360X105
ROHS Compliance	Yes

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059


+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

🌐 www.srfsteleinfra.in

SRFS TELEINFRA



**550-2700MHZ 500w 2 In 2 Out 4.3-10 Female Stripline
Directional Coupler**

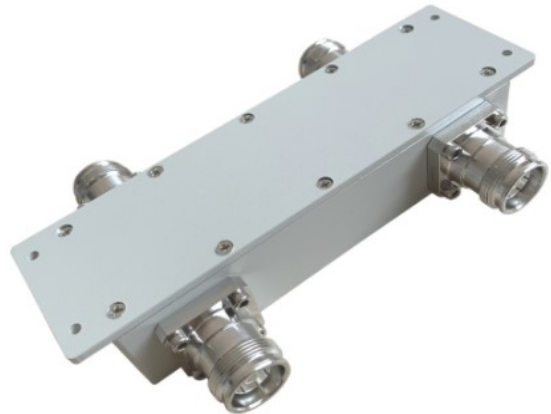

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

🌐 www.srfsteleinfra.in