


550-2700MHz 4.3-10 Mini Female Low PIM -153dBc -160dBc 3 Way Wilkinson Power Divider For Commercial DAS IBS

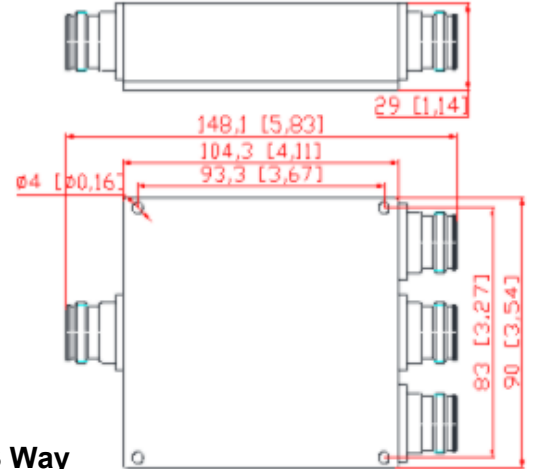

Product Description:

550-2700MHz Wilkinson Power Divider

550-2700MHz 4.3-10 Mini Female Low PIM -153dBc -160dBc 3 Way Wilkinson Power Divider For Commercial DAS IBS

Mechanical & Electrical Specifications	
Part Number	SRFS-PD-05527-OP3
Operating Frequency (MHz)	550-2700
Impedance (Ohm)	50
VSWR	≤1.3
Split Loss (dB)	≤5.58
Isolation (dB)	≥18
IM3 (dBc @ 2×43dBm)	-153
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	4.3-10 Female
Handling Power (Watt, max)	50(2w as combiner)
Peak Power (Watt, max)	200
Dimension (mm)(L×W×H, excl connector)	104.3× 90× 29
Net Weight (g)	670± 20
Packing Dimensions (mm,L×W×H)	170 × 100 × 40
Packing Carton Size (mm,L×W×H)	520 × 360 × 105
ROHS Compliance	Yes

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



**550-2700MHz 4.3-10 Mini Female Low PIM -153dBc -160dBc 3
Way Wilkinson Power Divider For Commercial DAS IBS**



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

🌐 www.srfsteleinfra.in