


4 Way Reactive Power Splitter Divider

Product Description:

550-6000MHz Reactive Power Splitter

550-6000MHz N Female Low PIM -165dbc 4 Way Reactive Power Splitter Divider For DAS IBS

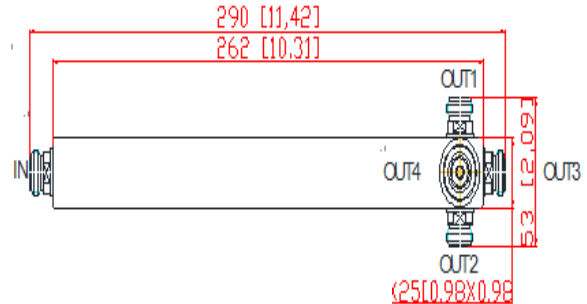

Mechanical & Electrical Specifications

Part Number	SRFS-PS-05560-ON4
Operating Frequency (MHz)	550-6000
Impedence (Ohm)	50
VSWR	≤1.3
Low PIM	-153dbc,-160dbc,-163dbc,-165dbc
Split Loss (dB)	≤6.7(smooth on test)
IM3 (dBc @ 2×43dBm)	-155/ -163
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	N Female
Handling Power (Watt, max)	300
Peak Power (Watt, max)	1200
Dimension (mm)(L×W×H, excl connector)	262 × 25 × 25
Net Weight (g)	460 ± 20
Packing Dimensions (mm, L×W×H)	320 × 80 × 60
Packing Carton Size (mm, L×W×H)	655 × 410 × 140
ROHS Compliance	Yes
Color	Customized
Connector	N Female
Design	Wide Band

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



4 Way Reactive Power Splitter Divider



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in