


698 To 3800MHz 4.3-10 Female 3x3 Hybrid Combiner

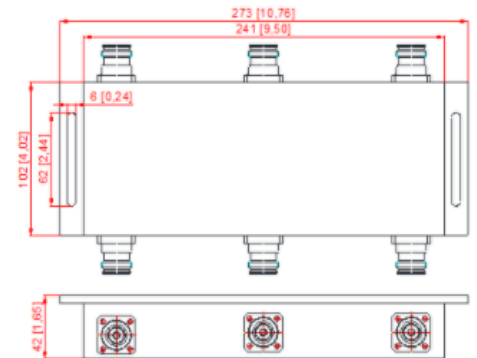

Product Description:

698 To 3800MHz 4.3-10 Female 3x3 Hybrid Combiner

698-3800MHz 4.3-10 Mini DIN Female Low PIM 3 In 3 Out 3x3 Hybrid Coupler Combiner For DAS IBS

The hybrid combiner is used to split and combiner RF signals. It is related to the 3 dB hybrid which is based on PCB transmission lines or dielectric 3db hybrid , and is most commonly used as combiner in distributed antenna system(DAS).

Mechanical & Electrical Specifications	
Part Number	SRFS-HC2x2-05560-ON
Operating Frequency (MHz)	550-6000
Impedance (Ohm)	50
VSWR	1.35(typically 1.22 @ all band)
Coupling (dB)	3
Insertion Loss (dB)	±1.5
Isolation (dB)	23
IM3 (dBc @ 2×43dBm)	-153/-163
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	N Female
Handling Power (Watt, max)	300
Peak Power (Watt, max)	1200
Dimension (mm)(L×W×H, excl connector)	131X40X36.4
Net Weight (g)	550
Packing Dimensions (mm,L×W×H)	170X100X40
Packing Carton Size (mm,L×W×H)	520X360X105
ROHS Compliance	Yes

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

698 To 3800MHz 4.3-10 Female 3x3 Hybrid Combiner

