


698 To 2700MHz 3dB Hybrid Coupler

Product Description:

698 To 2700MHz 3dB Hybrid Coupler

698-2700MHZ N Female Low PIM -160dbc 3dB Hybrid Coupler Combiner DAS

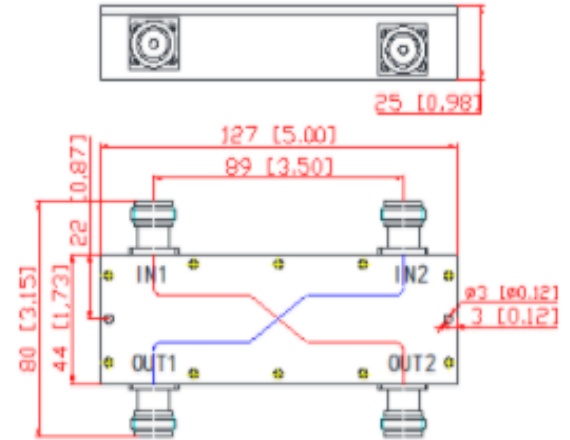

Mechanical & Electrical Specifications	
Part Number	SRFS-HC2x2-0727-ON
Operating Frequency (MHz)	698-2700
Impedance (Ohm)	50
VSWR	≤1.20
Coupling (dB)	3.0±0.8
Insertion Loss (dB)	3.6
Isolation (dB)	≥25
IM3 (dBc @ 2×43dBm)	-140 / -150 / -155 / -160
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	N Female
Handling Power (Watt, max)	300
Peak Power (Watt, max)	1200
Dimension (mm)(L×W×H, excl connector)	127 × 44 × 25
Net Weight (g)	385 ± 20
Packing Dimensions (mm,L×W×H)	165 × 87 ×35
Packing Carton Size (mm,L×W×H)	460 × 350 × 195
ROHS Compliance	Yes

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

698 To 2700MHz 3dB Hybrid Coupler

