


High Power Low Loss 8GHZ Antenna 4 Way Signal Splitter

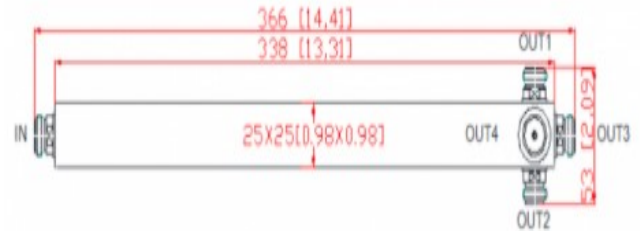

Product Description:

High Power Low Loss 8GHZ Antenna 4 Way Signal Splitter

350-3800MHz 380-3800MHz N Female 4 Way IP65 Low Pim -163dBc Reactive Power Splitter For DAS IBS

Reactive power splitters have been used to be signal divider- component for antenna distribution system (DAS) and signal cable systems for in-building /out building signal coverage because of their low loss and rugged nature., reactive splitters are quarter wave length lines matched to split signals evenly to the output paths. This characteristic allows for efficient, high power, broadband operation with minimal solder joints and better 3rd PIM

Mechanical & Electrical Specifications

Part Number	SRFS-PS-03538-ON4
Operating Frequency (MHz)	350/380-3800
Impedance (Ohm)	50
VSWR	≤1.3
Split Loss (dB)	≤7.7
IM3 (dBc @ 2×43dBm)	-155/ -160
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	N Female
Handling Power (Watt, max)	300
Peak Power (Watt, max)	1200
Dimension (mm)(L×W×H, excl connector)	338 × 25 × 25
Net Weight (g)	570 ± 20
Packing Dimensions (mm,L×W×H)	390X80X50
Packing Carton Size (mm,L×W×H)	500X395X270
ROHS Compliance	Yes
Color	Customized
Connector	N Female

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



High Power Low Loss 8GHZ Antenna 4 Way Signal Splitter



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in