


Round 50Ohm N Female 4 Way 350-430MHz Reactive Power Splitter

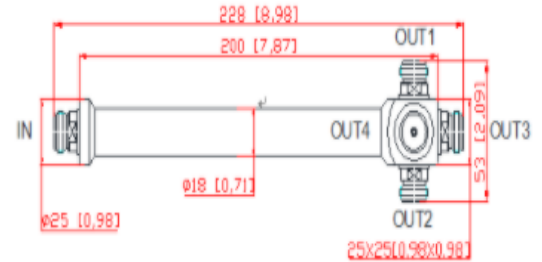

Product Description:

Round 50Ohm N Female 4 Way 350-430MHz Reactive Power Splitter

350-430MHz N Female 4 Way Reactive Round Design Power Splitter For Public Safety DAS IBS

Reactive power splitters have been used to be signal divider- component for antenna distribution system (DAS) and signal cable systems for in-building /out building signal coverage because of their low loss and rugged nature., reactive splitters are quarter wave length lines matched to split signals evenly to the output paths. This characteristic allows for efficient, high power, broadband operation with minimal solder joints and better 3rd PIM.

Mechanical & Electrical Specifications

Part Number	SRFS-PS-035043-ON4-R
Operating Frequency (MHz)	350-430
Impedance (Ohm)	50
VSWR	≤1.25
Split Loss (dB)	≤6.5
IM3 (dBc @ 2×43dBm)	-140 / -150 / -155/ -160
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	N Female
Handling Power (Watt, max)	300
Peak Power (Watt, max)	1200
Dimension (mm)(L×W×H, excl connector)	200 × 25 × 25
Net Weight (g)	195 ± 20
Packing Dimensions (mm,L×W×H)	240 × 80 × 50
Packing Carton Size (mm,L×W×H)	540 × 420 × 160
ROHS Compliance	Yes
Color	Customized
Connector	N Female

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



Round 50Ohm N Female 4 Way 350-430MHz Reactive Power Splitter



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in