


## 1.6 / 5.6 FEMALE R/A PCB MOUNT CONNECTOR CABLE

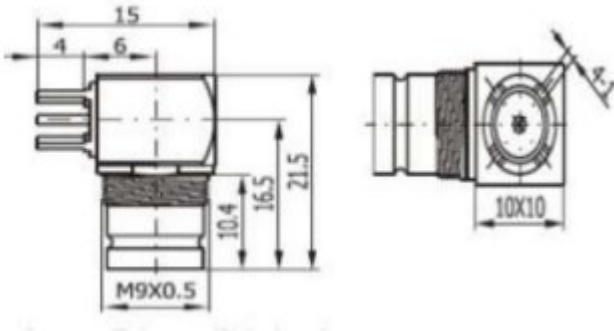

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Impedance	75 Ω	
Frequency	DC – 1 GHz	
VSWR	≤1.25 @ DC 1 GHz	
Dielectric Withstanding Voltage	≥1000 Vrms at Sea Level	
Dielectric Resistance	≥10000 MΩ	
Contat Resistance(Center Contact)	≤ 4 MΩ	
Contact Resistance (Outer Contact)	≤ 2 MΩ	
Mating cycles	≥500 times	
MATERIAL&PLATING		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center Conductor	Phosphor Bronze	Au
Resilient Contact	Phosphor Bronze	Au
Coupling Nut	Brass	Ni
Ferrule	Annealed Copper	Ni
ENVIRONMENTAL SPECIFICATIONS		
Temperature Range	- 40°C ~ +85 °C	
RoHS Compliant	Yes	