


Low PIM 100 Watt N Dummy Termination Load 50ohm N Male Terminator (SRFS-100-03-NM)

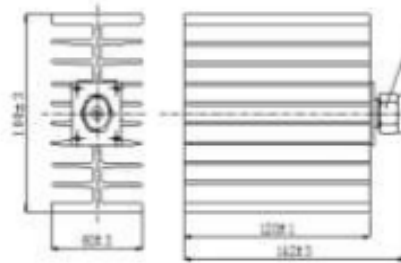

Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC- 3 GHz	
VSWR	≤1.15:1	
Impedance	50 Ω	
Average Power	100 Watt	
Peak Power	5μs:1KW	
3rd Order IMD	≤-105dBc @2x43dBm	
Connector	N Male	
MATERIALS		
	Material	Plating
Connector Body	Brass	Ni/Tri-Metal
Insulator	PTFE	-
Inner Conductor	Phosphor Bronze	Au
Housing	Aluminum	Black Passivation
Net Weight	650 gm	
Dimension	120 mm X 100mm X 60 mm	
ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature	-65°C~+85 °C	
Relative Humidity	5%-95%	
Storage Temperature	-60°C~+120 °C	
Weatherproof Rate	IP66	
RoHS Compliant	Yes	

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in