


Low PIM 20 Watt N Dummy Termination Load 50 ohm N male Terminator (SRFS-20-06-NM)

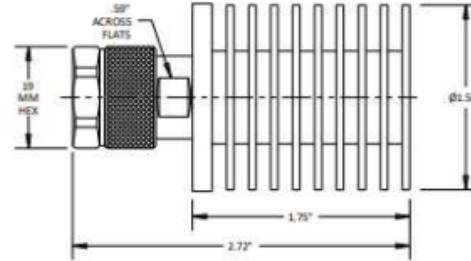

Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC~6 GHz	
VSWR	≤1.25	
Average Power	20 Watt	
Impedance	50 Ω	
Peak Power	5μs:0.1KW	
3rd Order IMD	≤-105dBc @2x43dBm	
Connector	N Male	
MATERIALS		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Inner Pin	Brass	Au
Resilient Contact	Beryllium Copper	Au
Socket Contact	Beryllium or Tin Bronze	Au
ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature	-65℃~+85 ℃	
Relative Humidity	5%-95%	
RoHS Compliant	Yes	