


## 3.8GHZ 4GHZ 6GHZ RF Load Termination

### Product Description:

3.8GHZ 4GHZ 6GHZ RF Load Termination

**200 Watts 3.8GHZ 4GHZ 6GHZ 4.3-10 Female Low PIM -163dbc -165dbc RF Load Termination**

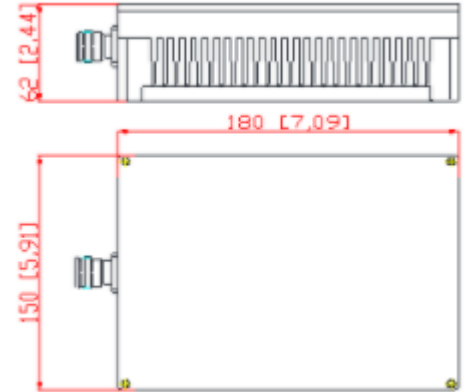

### Mechanical & Electrical Specifications

Mechanical & Electrical Specifications	
Part Number	SRFS-LD-4G-200W-OPf-S-160
Operating Frequency ( GHz )	0-4
Impedance ( Ohm )	50
VSWR	≤1.30 (≤1.2 @ DC-3.8G)
IM3 (dBc @ 2×43dBm)	-160
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature ( °C )	-40 ~ + 80
Interface	4.3-10 Female
Handling Power (Watt, max)	200
Dimension (mm)(L×W×H, excl connector)	180X150X62
Net Weight (g)	2330± 20
Packing Dimensions (mm,L×W×H)	305 × 170 × 115
Packing Carton Size (mm,L×W×H)	620 × 360 × 180
ROHS Compliance	Yes

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)

# SRFS TELEINFRA



3.8GHZ 4GHZ 6GHZ RF Load Termination



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

🌐 [www.srfsteleinfra.in](http://www.srfsteleinfra.in)