


3800HZ Low PIM Termination

Product Description:

3800HZ Low PIM Termination

100 Watts 3.8GHZ 4GHZ 6GHZ DIN Male Low PIM -163dbc -165dbc RF Load Termination

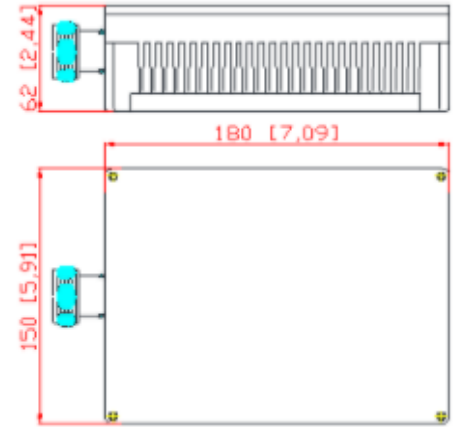

Mechanical & Electrical Specifications

Mechanical & Electrical Specifications	
Part Number	SRFS-LD-4G-100W-ODm-S-160
Operating Frequency (GHz)	0-4
Impedance (Ohm)	50
VSWR	≤1.30 (≤1.2 @ DC-3.8G)
IM3 (dBc @ 2×43dBm)	-160
Application	Indoor & Outdoor
Degree of Protection	IP65
Operating Temperature (°C)	-40 ~ + 80
Interface	Din Male
Handling Power (Watt, max)	100
Dimension (mm)(L×W×H, excl connector)	180X150X62
Net Weight (g)	1875 ± 20
Packing Dimensions (mm,L×W×H)	305 × 170 × 115
Packing Carton Size (mm,L×W×H)	620 × 360 × 180
ROHS Compliance	Yes

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in

SRFS TELEINFRA



3800HZ Low PIM Termination



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

🌐 www.srfsteleinfra.in