


4.3-10(MINI DIN) MALE STRAIGHT SCREW TYPE CONNECTOR FOR ½" SF FEEDER CABLE

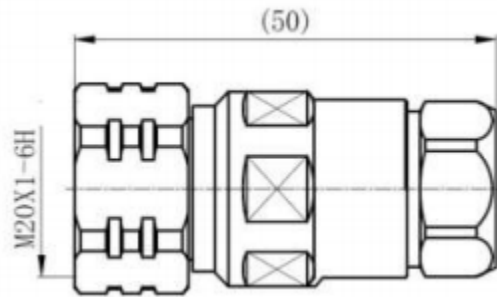

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Impedance	50 Ω	
Frequency	DC – 6 GHz	
VSWR	(DC-3GHz)≤1.10 (3-6GHz)≤1.20	
PIM	(@2-tonex20w) ≤-165dBC	
Dielectric Resistance	≥5000MΩ	
Dielectric withstanding voltage	≥2500V RMS, 50Hz, at sea level	
Center Contact Resistance	≤1.0m Ω	
Outer Contact Resistance	≤1.0m Ω	
Mating cycles	≥100 times	
MATERIAL&PLATING		
	Material	Plating
Body	Brass	Tri Alloy
Insulator	PTFE	-
Center conductor	Phosphor Bronze	Ag
Other	Brass	Ni
ENVIRONMENTAL SPECIFICATIONS		
Temperature Range	- 40°C ~ +85 °C	
RoHS Compliant	Yes	