


Low PIM 5 Watt DIN Dummy Termination Load 50 ohm DIN male Terminator (SRFS-5-7.5-DINM)

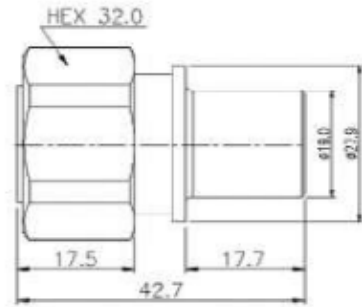

Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC~7.5 GHz	
VSWR	≤1.20:1	
Average Power	5 Watt	
Impedance	50 Ω	
Peak Power	5μs:0.1KW	
3rd Order IMD	≤-105dBc @2x43dBm	
Connector	DIN Male	
MATERIALS		
	Material	Plating
Body	Brass	Ternary Alloy
Insulator	PTFE	-
Center Contact	Brass	Ag
Hex Nut	Brass	Ternary Alloy
ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature	-65℃~+85 ℃	
Relative Humidity	5%-95%	
RoHS Compliant	Yes	