


Low PIM 5 Watt N Dummy Termination Load 50 ohm N Female Terminator (SRFS-5-06-NF)

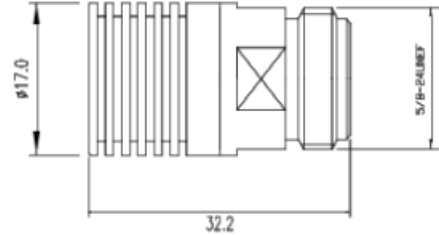

Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC~6 GHz	
VSWR	≤1.20:1	
Average Power	5 Watt	
Impedance	50 Ω	
Peak Power	5μs:0.1KW	
3rd Order IMD	≤-105dBc @2x43dBm	
Connector	N Female	
MATERIALS		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center Contact	Be-Cu	Au
Hex Nut	Brass	Ni
ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature	-65℃~+85 ℃	
Relative Humidity	5%-95%	
RoHS Compliant	Yes	