


## Low PIM 50 Watt DIN Dummy Termination Load 50 ohm DIN Female Terminator (SRFS-50-03-DINF)

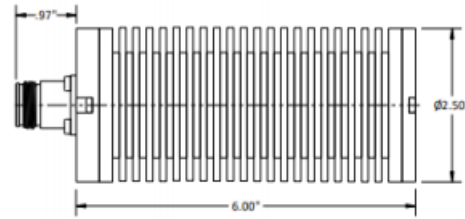

### Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC~3GHz	
VSWR	≤1.20	
Average Power	50 Watt	
Impedance	50 Ω	
Peak Power	5μs:0.1KW	
3rd Order IMD	≤-105dBc @2x43dBm	
Connector	DIN Female	
MATERIALS		
	Material	Plating
Body	Brass	Tri Metal(Cu/Sn/Zn)
Contact	BeCu	Ag
Dielectric PTFE -	PTFE	-
ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature	-65°C~+85 °C	
Relative Humidity	5%-95%	
RoHS Compliant	Yes	