


SRFS TELEINFRA



Low PIM 50 Watt N Dummy Termination Load 50 ohm N Male Terminator (SRFS-20-06-NM)

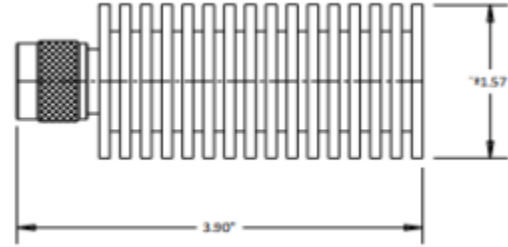

Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC~3GHz	
VSWR	≤1.25	
Average Power	50 Watt	
Impedance	50 Ω	
Peak Power	5μs:0.1KW	
3rd Order IMD	≤-105dBc @2x43dBm	
Connector	N Male	
MATERIALS		
	Material	Plating
Body	Brass	Tri Metal(Cu/Sn/Zn)
Contact	Brass	Au
Dielectric	PTFE	-
ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature	-65°C~+85 °C	
Relative Humidity	5%-95%	
RoHS Compliant	Yes	



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in