


# SRFS TELEINFRA



## BMA MALE PCB THRU-HOLE CONNECTOR R/A

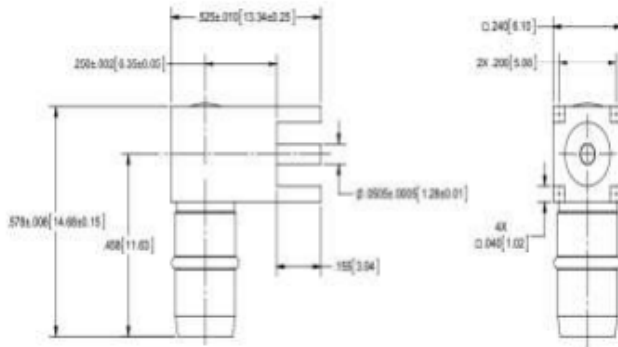

Electrical & Mechanical Specifications		
Characteristics Impedance	50 $\Omega$	
Frequency	18 GHz	
VSWR	1.02 + .008 f	
Insertion Loss	.03 $\sqrt{f}$	
Shielding Effectiveness	$\geq -90$ dB	
Insertion Force	3.0 lbs	
Dielectric Withstanding Voltage	1000 Vrms max. at sea level	
Withdrawal Force	1.5 lbs	
Material & Plating		
	Material	Plating
Body	Stainless Steel	Passivated
Insulator	PTFE	-
Center Conductor	Beryllium Copper	Au
Gasket	Fluorocarbon Rubber	-
Lock Washer	Phosphor Bronze	-
Environmental		
Temperature Range	-65°C~+165°C	
RoHS	Compliant Yes	



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)