


Low PIM 2 Watt BNC Dummy Termination Load 50ohm BNC Male Terminator (SRFS-2-03-BNC M)

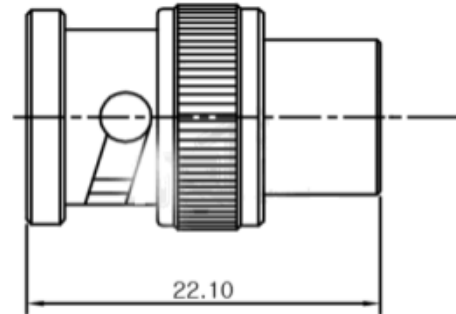

Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC~3 GHz	
VSWR	≤1.15:1	
Average Power	2 Watt	
Impedance	50 Ω	
Peak Power	5μs:0.1KW	
3rd Order IMD	≤-105dBc @2x43dBm	
Connector	BNC Male	
MATERIALS		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Center Contact	Brass	Au
Coupling Nut	Brass	Ni
ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature	-65°C ~ +85 °C	
Relative Humidity	5%-95%	
RoHS Compliant	Yes	