


DC-3800MHz N Male - N Female 50w Dummy Load

Product Description:

DC-3800MHz N Male - N Female 50w Dummy Load

DC-3.8GHz 50 Watts N Male-N Female 3~30dB RF Coaxial Attenuators

RF attenuators usually can be used to reduce the power of the signal within many RF circuit designs and RF systems. These RF attenuators can be fixed, switched, surface mounted or even continuously variable.

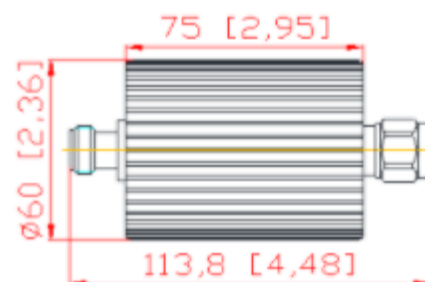

Mechanical & Electrical Specifications							
Part Number	SRFS-AT-3.8G-50W-ONX						
Operating Frequency (MHz)	DC-3800						
Impedance (Ohm)	50						
VSWR	≤1.25						
Application	Indoor & Outdoor						
Degree of Protection	IP65						
Handling Power (Watt, max)	50						
Interface	N Male - N Female						
Operating Temperature (°C)	-40 ~ + 80						
Attenuation(dB)	3	5	6	10	15	20	30
Attenuation Tolerance(dB)	±0.5	±0.5	±0.6	±0.8	±1	±1.5	±1.8
Dimension (mm)(L×W×H, excl connector)	75×Φ60						
Net Weight (g)	325± 20						
Packing Dimensions (mm,L×W×H)	170 × 70 ×70						
Packing Carton Size (mm,L×W×H)	370 × 370 × 180						
ROHS Compliance	Yes						

DC-3800MHz N Male - N Female 50w Dummy Load

