


Low PIM 5 Watt SMA Dummy Termination Load 50 ohm SMA Male Terminator (SRFS-5-06-SMAM)

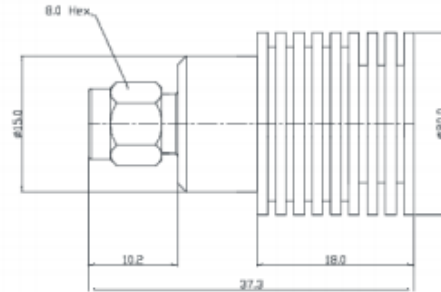

Product Features

- Reliable VSWR
- Easy Maintenance
- Wide Broadband Frequency Application

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC~6 GHz	
VSWR	≤1.15:1	
Average Power	5 Watt	
Impedance	50 Ω	
Peak Power	5μs:0.1KW	
3rd Order IMD	≤-105dBc @2x43dBm	
Connector	SMA Male	
MATERIALS		
	Material	Plating
Body	Brass	Ni
Insulator	PTFE	-
Connector Coupling	Stainless Steel	Passivated
Coupling Connector Body	Brass	Tri- Alloy
Center Contact	Be-Cu	Au
ENVIRONMENTAL SPECIFICATIONS		
Operating Temperature	-65°C~+85 °C	
Relative Humidity	5%-95%	
RoHS Compliant	Yes	