



2.92mm male to 2.92mm female SRFS4005 DC~40GHz, 5W

Features:

- * Low VSWR
- * High Attenuation Flatness



Outline A

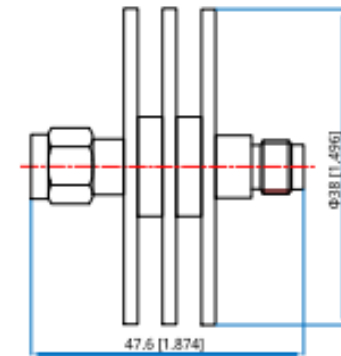

Outline B

| Electrical Specifications | |
|------------------------------|------------------------------|
| Frequency | DC~40GHz |
| Attenuation | 1~10dB, 20dB, 30dB, 40dB |
| Impedance | 50Ω |
| Average Power | 5W@25°C max. |
| RF Connectors | 2.92mm |
| Housing | Aluminum |
| Dielectric | PEI |
| Outer Conductor | Stainless steel |
| Male Inner Conductor | Gold plated brass |
| Female Inner Conductor | Gold plated beryllium copper |
| VSWR | 1.25,1.40@40dB |
| Tolerance | ±2mm [±0.08in] |
| Environmental Specifications | |
| Operating Temperature | -55° to + 85° |