


SRFS TELEINFRA



2.92mm male to 2.92mm female SRFS4010 DC~40GHz, 10W

Features:

- * Low VSWR
- * High Attenuation Flatness

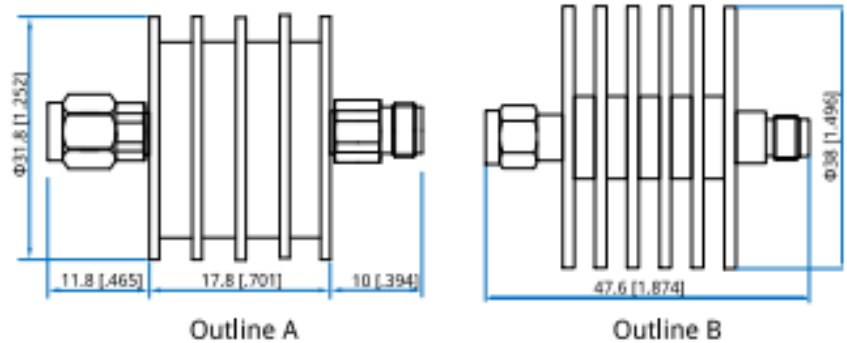

Electrical Specifications	
Frequency	DC~40GHz
Attenuation	1~10dB, 20dB, 30dB, 40dB
Impedance	50Ω
Average Power	10W@25°C max.
RF Connectors	2.92mm
Housing	Aluminum
Dielectric	PEI
Outer Conductor	Stainless steel
Male Inner Conductor	Gold plated brass
Female Inner Conductor	Gold plated beryllium copper
VSWR	1.25, 1.4@40dB
Tolerance	±2mm [±0.08in]
Environmental Specifications	
Operating Temperature	-55° to + 85°



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in