


# SRFS TELEINFRA



## 2.92mm male to 2.92mm female SRFS4050 DC~40GHz, 50W

### Features:

- \* Low VSWR
- \* High Attenuation Flatness

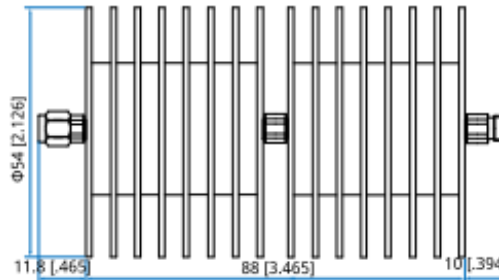

Electrical Specifications	
Frequency	DC~40GHz
Attenuation	20dB, 30dB,40dB
Impedance	50Ω
Average Power	50W@25°C max.
RF Connectors	2.92mm
Housing	Aluminum
Dielectric	PEI
Outer Conductor	Stainless steel
Male Inner Conductor	Gold plated brass
Female Inner Conductor	Gold plated beryllium copper
VSWR	1.35
Tolerance	±2mm [±0.08in]
Environmental Specifications	
Operating Temperature	-55° to + 125°



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 [info@srfsteleinfra.in](mailto:info@srfsteleinfra.in), [info@srfsteleinfra.com](mailto:info@srfsteleinfra.com)

[www.srfsteleinfra.in](http://www.srfsteleinfra.in)