


SRFS TELEINFRA



MINI-UHF MALE CRIMP CONNECTOR LMR 240

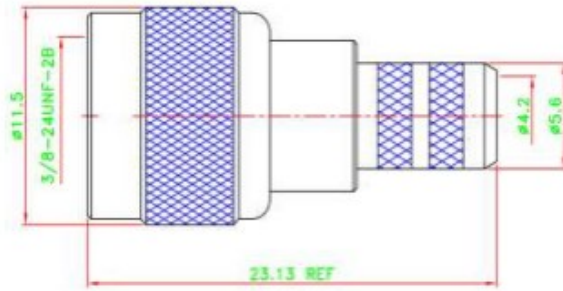

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC to 2.5 GHz	
Impedance	50Ω	
VSWR	1.25 Max	
Voltage Rating	330 Vrms	
Dielectric Withstanding Voltage	1000 Vrms	
Insertion Loss	0.20 dB	
Cable Attachment	Hex Braid Crimp	
Center Conductor Attachment	Crimp or Solder	
Cable Retention	40 lbs. Pull	
MATERIAL&PLATING		
	Material	Plating
Body	Brass	Ni
Contact	Brass	Au
Insulator	Teflon	-
Ferrule	Copper	Ni
ENVIRONMENTAL SPECIFICATIONS		
Temperature Range	- 55°C ~ +85 °C	
RoHS Compliant	Yes	

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 ✉ info@srfsteleinfra.in, info@srfsteleinfra.com

🌐 www.srfsteleinfra.in