


Mini DIN 4.3/10 Female Clamp Connector for 1/2" S.F Cable

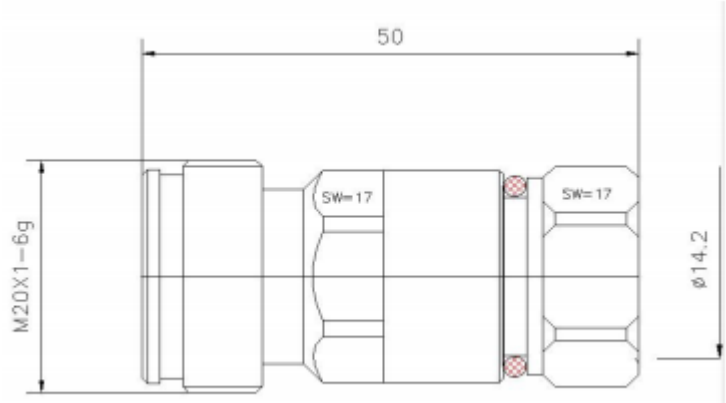

Electrical & Mechanical Specifications		
Characteristic Impedance	50 ohm	
Frequency Range	DC-6 GHz	
VSWR	≤1.10@DC-3 GHz	
Dielectric Withstanding Voltage	≥2500V RMS,50Hz,at sea level	
Dielectric Resistance	≥5000MΩ	
Contact Resistance	Center Contact ≤1mΩ Outer Contact ≤1mΩ	
Durability	Mating cycles ≥100	
Material & Plating		
	Material	Plating
Body	Brass	Tri-alloy
Insulator	PTFE	—
Center conductor	Phosphor bronze	Ag
Environmental		
Temperature Range	-40℃~+85℃	
RoHs Compliant	Yes	