
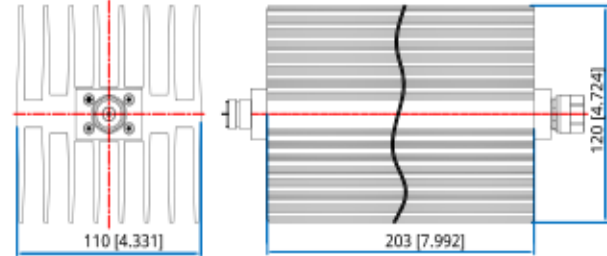


N male to N Female SRFS18K2 DC~18GHz,200W

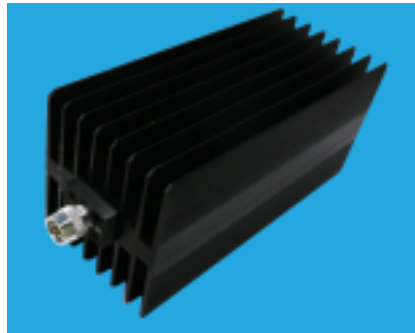

Features:

- * Low VSWR
- * High Attenuation Flatness

Electrical Specifications	
Frequency	DC~18GHz
Attenuation	10~60dB
Impedance	50Ω
Average Power	200W@25°C max.
RF Connectors	N, SMA
Dielectric	PEI
Tolerance	±2mm [±0.08in]
Environmental Specifications	
Operating Temperature	-55° to + 125°

Attenuation Accuracy and VSWR

Frequency (GHz)		Attenuation Accuracy (±dB) vs. Attenuation (dB)					VSWR (max.)
	3	6~10	20	30	40	50~60	
DC~4	0.7	0.7	0.8	0.9	0.9	0.9	1.20
DC~8	0.8	0.8	0.9	0.9	0.9	0.9	1.25
DC~12.4	0.9	0.9	1.0	1.1	1.1	1.1	1.35
DC~18	2.0	-	1.5	1.3	1.4	1.4	1.45