


SMA male to SMA female SRFS2605 DC~26.5GHz, 5W

Features:

- * Low VSWR
- * High Attenuation Flatness

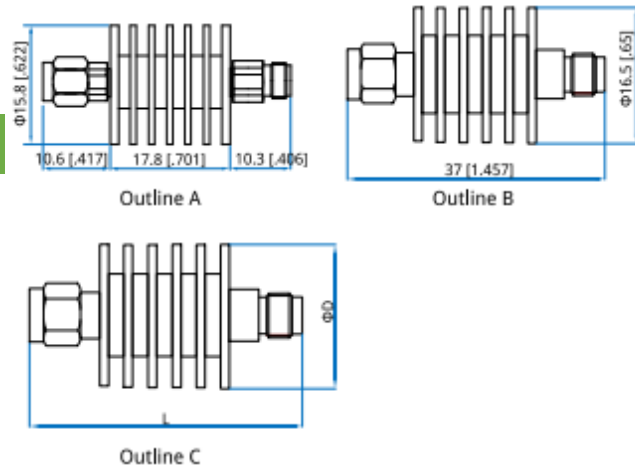

Electrical Specifications	
Frequency	DC~26.5GHz
Attenuation	1~80dB
Impedance	50Ω
Average Power	5W@25°C max.
RF Connectors	SMA,3.5mm
Housing	Aluminum
Outer Conductor	Passivated stainless steel or Gold/Nickel Plated Brass
Male Inner Conductor	Gold plated brass
Female Inner Conductor	Gold plated beryllium copper
VSWR	1.25,1.35@40-50dB
Tolerance	±0.2mm [±0.08in]
Environmental Specifications	
Operating Temperature	-55° to + 85°