


SMA male to SMA female SRFS26K1 DC~26.5GHz, 100W

Features:

- * Low VSWR
- * High Attenuation Flatness

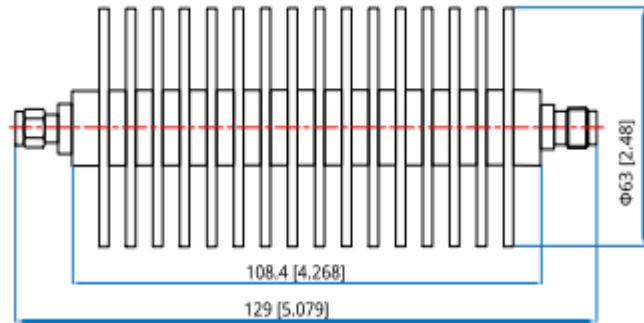

Electrical Specifications	
Frequency	DC~26.5GHz
Attenuation	3-50dB
Impedance	50Ω
Average Power	100W@25°C max.
RF Connectors	SMA, 3.5mm
Dielectric	PEI
Housing	Aluminum
Outer Conductor	Gold plated brass
Male Inner Conductor	Gold plated brass
Female Inner Conductor	Gold plated beryllium copper
VSWR(max)	1.30/1.40
Tolerance	±0.2mm [±0.08in]
Environmental Specifications	
Operating Temperature	-55° to + 85°