



SRFS-10-18000 10MHz~18GHz

Features:


- * Low VSWR
- * Broadband

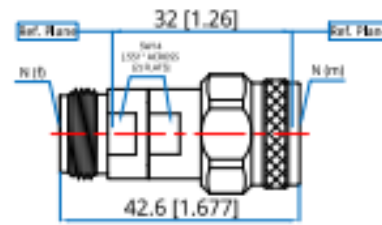

Outline A

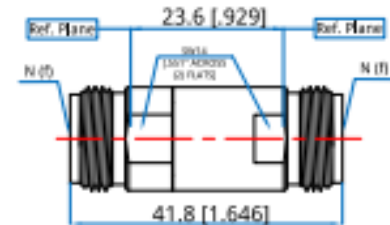

Outline B

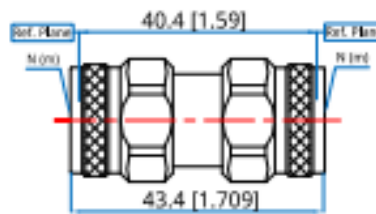

Outline C

Electrical Specifications	
Frequency	0.01-18GHz
VSWR	1.25 max
Insertion loss	0.6dB max.
Impedance	50 Ohms
Voltage	50V max.
Connector	N
Mating Life Cycle	500 cycles
Outer Conductor	Passivated Stainless Steel
Dielectric	PEI
Inner Conductor	Gold plated beryllium copper
Tolerance	±0.2mm [±0.008in]
Environmental Specifications	
Operating Temperature	-55° to + 165°