



SRFS TELEINFRA



SRFS-10-26500 10MHz~26.5GHz

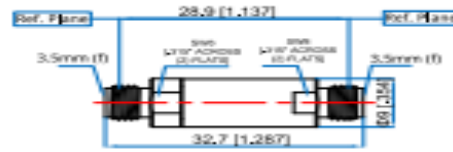


Outline A

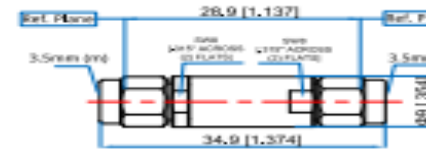



Outline B



Outline C

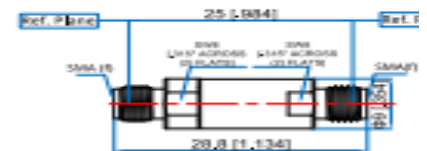

Outline D

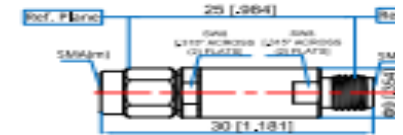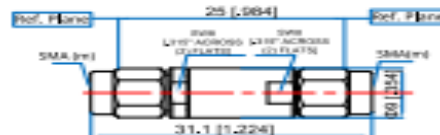

Features:

- * Low VSWR
- * Broadband

Electrical Specifications	
Frequency	0.01-26.5GHz
VSWR	1.3 max. @10-30MHz 1.25 max@0.03-26.5GHz
Insertion loss	0.8dB max.
Impedance	50 Ohms
Voltage	50V max.
Connector	SMA,3.5mm
Mating Life Cycle	500 cycles PEI
Outer Conductor	Passivated Stainless Steel
Dielectric	PEI or PTFE
Inner Conductor	Gold plated beryllium copper
Tolerance	±0.2mm [±0.008in]
Environmental Specifications	
Operating Temperature	-55° to + 165°



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in