



SRFS TELEINFRA


SRFS-10-50000 10MHz~50GHz

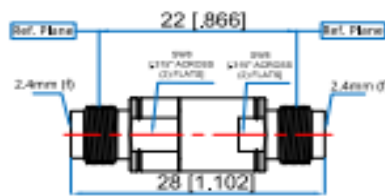

Outline A

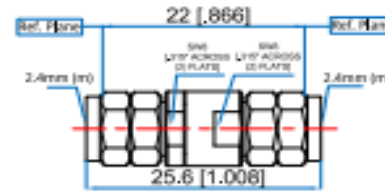

Outline B

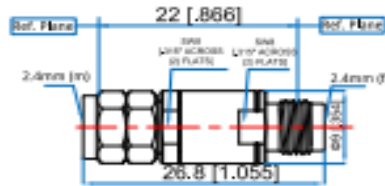

Outline C

Features:

- * Low VSWR
- * Broadband

Electrical Specifications	
Frequency	0.01-50GHz
VSWR	1.3 max.
Insertion loss	0.8dB max.
Impedance	50 Ohms
Voltage	50V max.
Connector	2.4mm
Mating Life Cycle	500 cycles
Outer Conductor	Passivated Stainless Steel
Dielectric	PEI
Inner Conductor	Gold plated beryllium copper
Tolerance	±0.2mm [±0.008in]
Environmental Specifications	
Operating Temperature	-55° to + 85°

S



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in