


SRFS TELEINFRA



SRFS 110 Phase & Loss Stable, Long Flex Life

Features:

- * Low Insertion Loss
- * High Phase Stability
- * High Power
- * High Durability

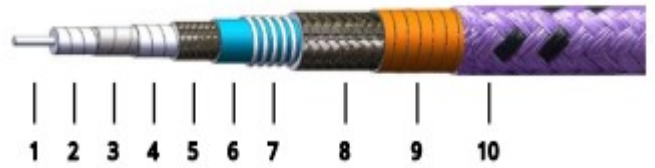

Electrical & Mechanical Specifications	
Frequency:	DC~110GHz
Impedance:	50Ω
Velocity of Propagation:	80%
Shielding Effectiveness:	90dB min. Voltage Withstand: 400V DC
Unarmored Bend Radius(installation/repeated):	10mm/20mm min.
Armored Bend Radius (installation/repeated):	30mm/50mm min.
Bending Life Cycle:	50,000
Material & Plating	
	Material & Plating
Inner Conductor	Silver-plated copper
Dielectric	Low density PTFE
Inner Shield	Silver-plated copper tape
Interlayer	Low density PTFE
Outer Shield	Silver-plated copper braid
Jacket	FEP
Environmental	
Temperature Range	-55°C~+125°C



Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in