


UHF FEMALE CRIMP CONNECTOR FOR LMR 240

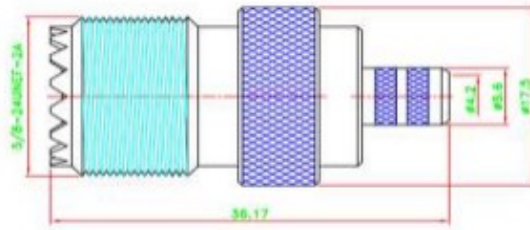

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC- 300 GHz	
Impedance	Non-Constant	
Voltage Rating	500 Volts peak	
Dielectric Withstanding Voltage	1000 Vrms	
Insertion Loss	.20 dB Max	
Cable Attachment	Hex Braid Crimp	
Center Conductor Attachment	Solder	
Cable Retention	40 lbs. Pull	
MATERIAL&PLATING		
	Material	Plating
Body	Brass	Ni
Contact	Brass	Au
Insulator	Teflon	-
Ferrule	Brass	Ni
ENVIRONMENTAL SPECIFICATIONS		
Temperature Range	- 55°C ~ +85 °C	
RoHS Compliant	Yes	