


UHF FEMALE CRIMP CONNECTOR FOR LMR 600

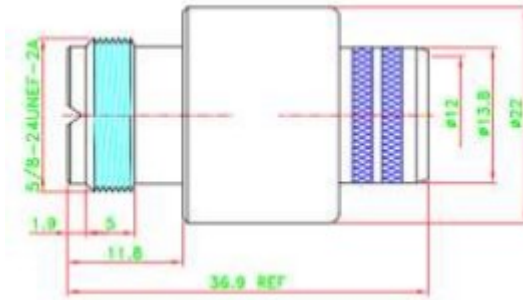

| ELECTRICAL&MECHANICAL SPECIFICATIONS | | |
|--------------------------------------|----------------------------|------------------------------------|
| Frequency Range | DC- 300 GHz | |
| Impedance | Non-Constant | |
| Voltage Rating | 500 Volts peak | |
| Dielectric Withstanding Voltage | 1000 Vrms | |
| Insertion Loss | <.20 dB Max | |
| Cable Attachment | Hex Braid Crimp | |
| Center Conductor | Attachment Crimp or Solder | |
| Cable Retention | 40 lbs. Pull | |
| MATERIAL&PLATING | | |
| | Material | Plating |
| Body | Brass | Tri-Metal Alloy(Copper, tin, Zinc) |
| Contact | Brass | Au |
| Insulator | PTFE | - |
| Ferrule | Brass | Tri-Metal Alloy(Copper, tin, Zinc) |
| ENVIRONMENTAL SPECIFICATIONS | | |
| Temperature Range | - 55°C ~ +85 °C | |
| RoHS Compliant | Yes | |