


SRFS TELEINFRA



UHF FEMALE STRAIGHT PANEL MOUNT SOLDER

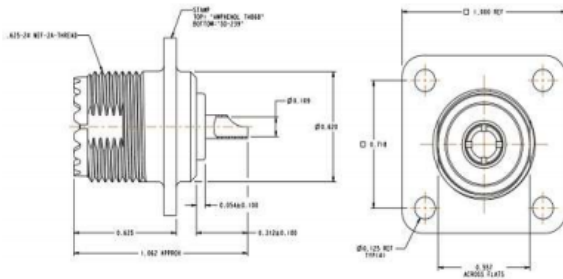

ELECTRICAL&MECHANICAL SPECIFICATIONS

Characteristics Impedance	50 Ω	
Frequency Range	DC-300 MHz	
VSWR	≤ 1.07	
Dielectric Strength	≥ 2000 Vrms, at sea level	
Dielectric Resistance	≥ 5000 M Ω	
Insertion Loss	≤ 0.08 dB (@2200MHz)	
Contact Resistance	Center Contact ≤ 5 m Ω Outer Contact ≤ 5 m Ω	
Durability	Mating cycles ≥ 500	
MATERIAL&PLATING		
	Material	Plating
Body	Brass	Au/Ni
Outer Contact	Brass	CuSnZn
Center Contact	Brass	Au
Fastener	Brass	Ni
Dielectric	PTFE	-
ENVIRONMENTAL SPECIFICATIONS		
Temperature Range	- 40°C ~ +85 °C	
RoHS Compliant	Yes	