


SRFS TELEINFRA



UHF MALE CRIMP CONNECTOR FOR LMR 400

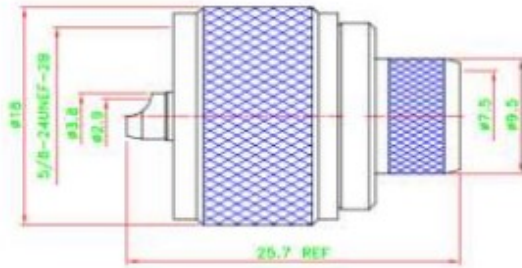

ELECTRICAL&MECHANICAL SPECIFICATIONS		
Frequency Range	DC- 300 GHz	
Impedance	Non-Constant	
Voltage Rating	500 Volts peak	
Dielectric Withstanding Voltage	1000 Vrms	
Insertion Loss	<.20 dB Max	
Cable Attachment	Hex Braid Crimp	
Center Conductor	Attachment Crimp or Solder	
Cable Retention	40 lbs. Pull	
MATERIAL&PLATING		
	Material	Plating
Body	Brass	Ni
Contact	Brass	Au
Insulator	Delrin	-
Ferrule	Brass	Ni
ENVIRONMENTAL SPECIFICATIONS		
Temperature Range	- 55°C ~ +85 °C	
RoHS Compliant	Yes	