


# SRFS TELEINFRA



UHF MALE CRIMP CONNECTOR FOR RG58 / 141 /142, LMR 195

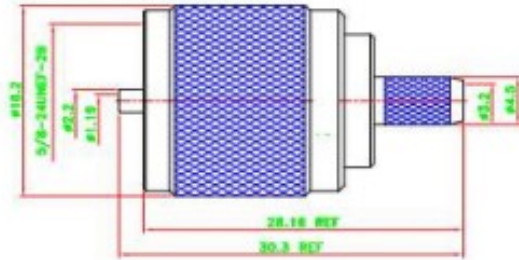

| ELECTRICAL&MECHANICAL SPECIFICATIONS |                            |         |
|--------------------------------------|----------------------------|---------|
| Frequency Range                      | DC- 300 GHz                |         |
| Impedance                            | Non-Constant               |         |
| Voltage Rating                       | 500 Volts peak             |         |
| Dielectric Withstanding Voltage      | 1000 Vrms                  |         |
| Insertion Loss                       | .50 dB Max                 |         |
| Cable Attachment                     | Hex Braid Crimp            |         |
| Center Conductor                     | Attachment Crimp or Solder |         |
| Cable Retention                      | 40 lbs. Pull               |         |
| MATERIAL&PLATING                     |                            |         |
|                                      | Material                   | Plating |
| Body                                 | Brass                      | Ni      |
| Contact                              | Brass                      | Au      |
| Insulator                            | PTFE                       | -       |
| Ferrule                              | Brass                      | Ni      |
| ENVIRONMENTAL SPECIFICATIONS         |                            |         |
| Temperature Range                    | - 55°C ~ +85 °C            |         |
| RoHS Compliant                       | Yes                        |         |