

## High-Power LPDA Antenna Model no.:SRFS- LPDA-A0031

### Product Description

The LPDA-A0031 is a directional log-periodic dipole array that is primarily designed for high-powered transmit applications. It covers the frequency band of 500 to 1000 MHz at 1000 W of power, with a typical gain of 9 dBi. The antenna can be adjusted easily for horizontal or vertical polarization via a swivel mounting bracket on a mast.

This antenna can be customized if required, for different frequency ranges.

### Product Feature

- High feed power handling of 1 kW
- Low VSWR
- High gain over the band




Electrical Specifications	
Frequency range	500 – 1000 MHz
VSWR	< 2:1
Nominal input impedance	50 Ω
Connector	7/16 female
Feed power handling	1000 W
MTBF	50,000 h
Gain	9 dBi typical
Polarization	Linear (Vertical and horizontal)
Mechanical Specifications	
Dimensions (l x w x d)	1385 mm x 292 mm x 170 mm
Total mass	4.2 kg (excluding swivel bracket)
Material	Aluminium, stainless steel and plastics
Mounting method	U-bolts supplied for 60 – 100 mm masts
Environmental Specifications	
Wind survival on mast	160 km/h (calculated)
Temperature (operational)	-30 °C to +70 °C
Water and dust resistance	IP66


## High-Power LPDA Antenna Model no.:SRFS- LPDA-A0031

### VSWR AND GAIN GRAPHS:

#### Measured VSWR:

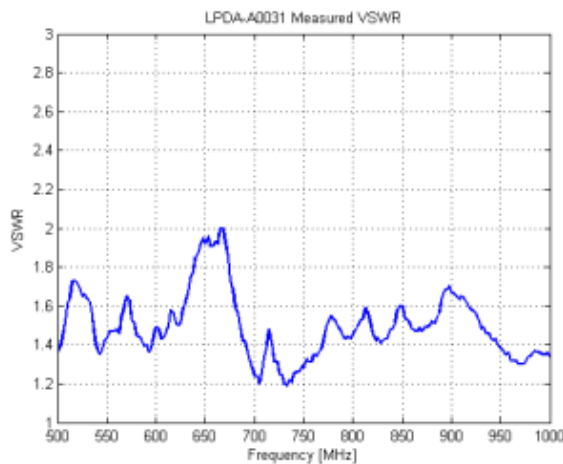


#### Measured GAIN:

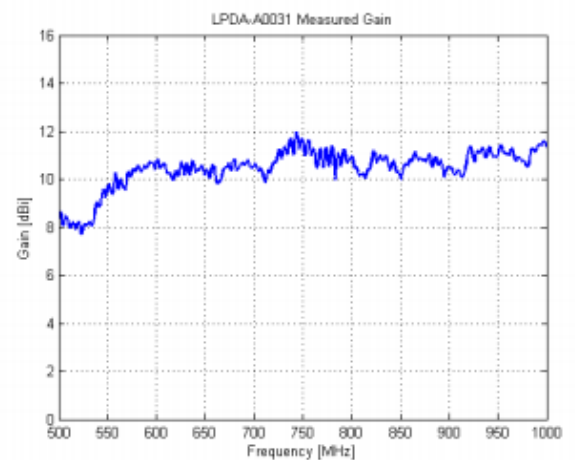

### RADIATION PATTERNS:

#### E-PLANE PATTERN:

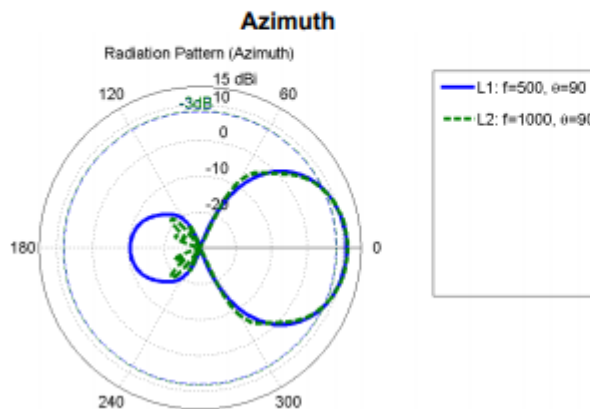

#### H-PLANE PATTERN:

