

High-Power LPDA Antenna Model no.:SRFS- LPDA-A0112

Product Description

The LPDA-A0112 directional log-periodic dipole array (LPDA) is designed for high-power applications. It covers a frequency band of 400 to 3000 MHz with a gain of 6.5 dBi. The antenna is completely encapsulated in a Radome. The antenna is provided with a mounting bracket allowing it to be mounted for horizontal or vertical polarization.

Product Feature

- Wideband frequency 400 to 3000 MHz
- VSWR < 2.0:1
- Moderate gain: 6.5 dBi
- Rugged construction
- Ice resistant



Electrical Specifications	
Frequency range	400 – 3000 MHz
VSWR	< 2:1
Nominal input impedance	50 Ω DC grounded
Connector	N-type female
Feed power handling	250 W CW
Gain	> 6.5 dBi typical
E-plane 3 dB beamwidth	≥ 65°
H-plane 3 dB beamwidth	≥ 110°
Polarization	Vertical / horizontal
Mechanical Specifications	
Dimensions (l x w x h)	< 720 mm x 80 mm x 470 mm
Material	Aluminium, fibreglass
Total mass	< 10 kg incl. mounting bracket
Mounting method	Bracket onto a mast
Packaging	Transportable bag or crate
MTBF	500,000 h
Environmental Specifications	
Wind survival	160 km/h
Temperature	-35 °C to 71 °C
Effective wind area	0.3 m ²
Corrosion	Appropriate anti-corrosion measures are taken in the design of antenna for


SRFS TELEINFRA




High-Power LPDA Antenna Model no.:SRFS- LPDA-A0112

VSWR AND GAIN GRAPHS:


SIMULATED VSWR:

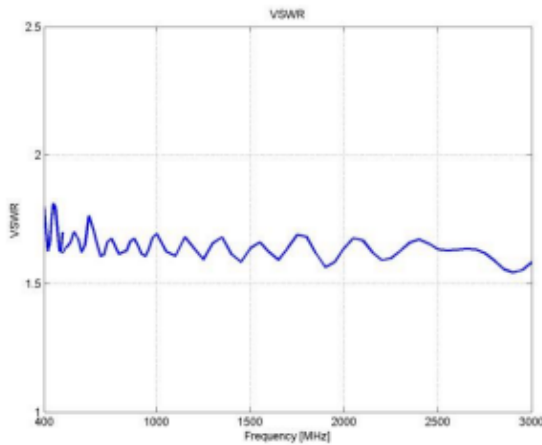

SIMULATED GAIN:

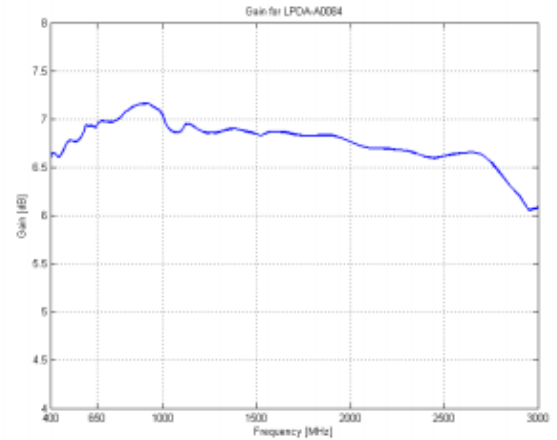

RADIATION PATTERNS:

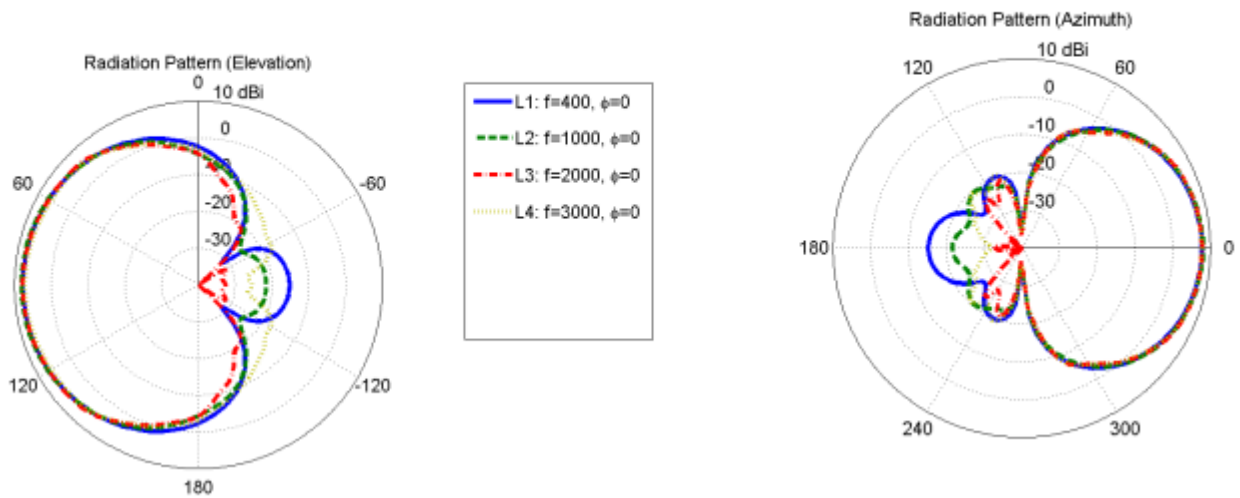

Plot no 10 Shiv Vihar A Block Najafgarh Nala Road Vikasnagar Uttam Nagar New Delhi-110059

+91-9027232570, +91-8800726650 info@srfsteleinfra.in, info@srfsteleinfra.com

www.srfsteleinfra.in